





CUTTING AND GRINDING DISCS



	Diameter	Thickness	Hole	Package	
Stainless Steel TR-AA24R-BF	100 mm(4")	3.2 mm	16 mm	100	
	115 mm(4.5")	3.2 mm	22 mm	100	
	125 mm(5")	3.2 mm	22 mm	100	
	180 mm(7")	3.2 mm	22 mm	50	
	230 mm(9")	3.2 mm	22 mm	50	
Steel TR-A24R-BF	100 mm(4")	3.2 mm	16 mm	100	
	115 mm(4.5")	3.2 mm	22 mm	100	
	125 mm(5")	3.2 mm	22 mm	100	
	180 mm(7")	3.2 mm	22 mm	50	
	230 mm(9")	3.2 mm	22 mm	50	
Stone TR-C24R-BF	100 mm(4")	3.2 mm	16 mm	100	
	115 mm(4.5")	3.2 mm	22 mm	100	
	125 mm(5")	3.2 mm	22 mm	100	
	180 mm(7")	3.2 mm	22 mm	50	
	230 mm(9")	3.2 mm	22 mm	50	
Cast Iron CD-GH24R-BF	180 mm(7")	3.2 mm	22 mm	50	
	230 mm(9")	3.2 mm	22 mm	50	

CUTTING AND GRINDING DISCS



	Diameter	Thickness	Hole	Package	
Stainless Steel TR-AA24R-BF	300 mm(12")	2.8 mm	25.4 mm	30	
	350 mm(14")	3.0 mm	25.4 mm	30	
	400 mm(16")	3.2 mm	25.4mm	30	
Steel TR-A24R-BF	300 mm(12")	2.8 mm	25.4 mm	30	
	300 mm(12")	3.5 mm	25.4 mm	25	
	350 mm(14")	3.0 mm	25.4 mm	30	
	350 mm(14")	3.8 mm	25.4 mm	25	
	400 mm(16")	3.2 mm	25.4 mm	30	
	400 mm(16")	4.2 mm	25.4 mm	25	
Stone TR-C24R-BF	300 mm(12")	2.8 mm	25.4 mm	30	
	300 mm(12")	3.5 mm	25.4 mm	25	
	350 mm(14")	3.0 mm	25.4 mm	30	
	350 mm(14")	3.8 mm	25.4 mm	25	
	400 mm(16")	3.2 mm	25.4 mm	30	
	400 mm(16")	4.2 mm	25.4 mm	25	

Drill chuck



HD 310S
Keyless Drill Chucks
1.5 - 10 mm
3/8" - 24 UNF
CE



HD 313S
Keyless Drill Chucks
1.5 - 13 mm
1/2" - 20 UNF
CE



HD 610
Drill Chuck With A Type Key
1.5 - 10 mm
3/8" - 24 UNF
CE



HD 613
Drill Chuck With A Type Key
1.5 - 13 mm
3/8" - 20 UNF
CE



HD 710
Drill Chuck With H Type Key
Professional Ball Bearing
Build In DIN 6349 Type
1-10 mm
3/8" - 24 UNF
CE



HD 713
Drill Chuck With H Type Key
Professional Ball Bearing
Build In DIN 6349 Type
1.5-13 mm
1/2" - 20 UNF
CE



Description:
Capacity:
Mount:
Approvals:

Description:
Capacity :
Mount :
Approvals:

Description:
Capacity:
Mount:
Approvals:

TAPER SHANK



HD 2116

Description: Professional Taper Shank
H Type Key
Capacity: 1 -16 mm
Mount: B 18
Approvals: CE



HD 2120

Description: Professional Taper Shank
H Type Key
Capacity: 5 -20 mm
Mount: B 22
Approvals: CE



HD 813

Description: Professional Taper Shank
H Type Key
Capacity : 1 -13 mm
Mount : B 16
Approvals: CE

Description:

Capacity:

Mount:

Approvals:

FLAP WHEEL

When in use , DISC FLAP WHEEL does not blow or vibrate while grinding. As it is flexible, it is suitable for curved area and surface treatment and used for various purposes such as furniture, musical instrument, woodwork, general metal, non-ferrous metal , stainless steel , automobile, paint grinding and so on.



Outside Diameter	Inside Diameter	Flap Sheets	Grit	Approvals
100 mm(4")	16 mm(5/8")	46 PCS	All grit	CE
100 mm(4")	16 mm(5/8")	60 PCS	All grit	CE
140 mm(5 1/2")	22 mm(7/8")	90 PCS	All grit	CE
178 mm(7")	22 mm(7/8")	08 PCS	All grit	CE



DISC WHEEL

The sizes of J.X Gold FLAP DISC WHEEL are in the range of 4"(100mm) through 7"(178mm) in diameter . As high- performance grinding materials are used , its grinding power is very strong and it does not blow off while grinding. And as its durability is very high, it is used for rough welding area while shipbuilding , stainless steel , ceramic , glass , artificial marble . aerospace, automobile , metal in all industries. As a high-density product, it is a multi-purpose product showing versatility



Outside Diameter	Inside Diameter	Flap Sheets	Grit	Approvals
100 mm(4")	16 mm(5/8")	70 PCS	All Grit	CE
115 mm(4 1/2")	22 mm(7/8")	72 PCS	All Grit	CE
178 mm(7")	22 mm(7/8")	110 PCS	All Grit	CE

SAW BLADE



T.C.T.SAW BLADE Cutting For Aluminum

Model	Dimensions	Teeth
HD 08101	250x2.8x30	60T
HD 08102	250x2.8x30	80T
HD 08103	250x2.8x30	100T
HD 08104	300x3x30	100T
HD 08105	300x3x30	120T
HD 08106	350x3.2x30	100T



Normal Saw Blade Cutting For Wood


Model	Dimensions	Teeth
HD 08000	180 x1.5x20	60T
HD 08001	205x1.5x30	80T
HD 08002	250x1.8x30	100T
HD 08003	300x2.0x30	120T
HD 08004	355x2.2x30	120T



T.C.T.SAW BLADE Cutting For Wood

Model	Dimensions	Teeth
HD 08010	185x2.4x20	36T
HD 08011	185x2.4x20	48T
HD 08012	203x2.4x20	40T
HD 08013	203x2.4x20	60T
HD 08014	210x2.4x25.4	40T
HD 08015	210x2.4x25.4	60T
HD 08016	230x2.6x25.4	40T
HD 08017	230x2.6x25.4	60T
HD 08018	250x2.7x30	60T
HD 08019	250x2.7x30	80T
HD 08020	350x2.7x30	80T

GAS WELDING HOSE

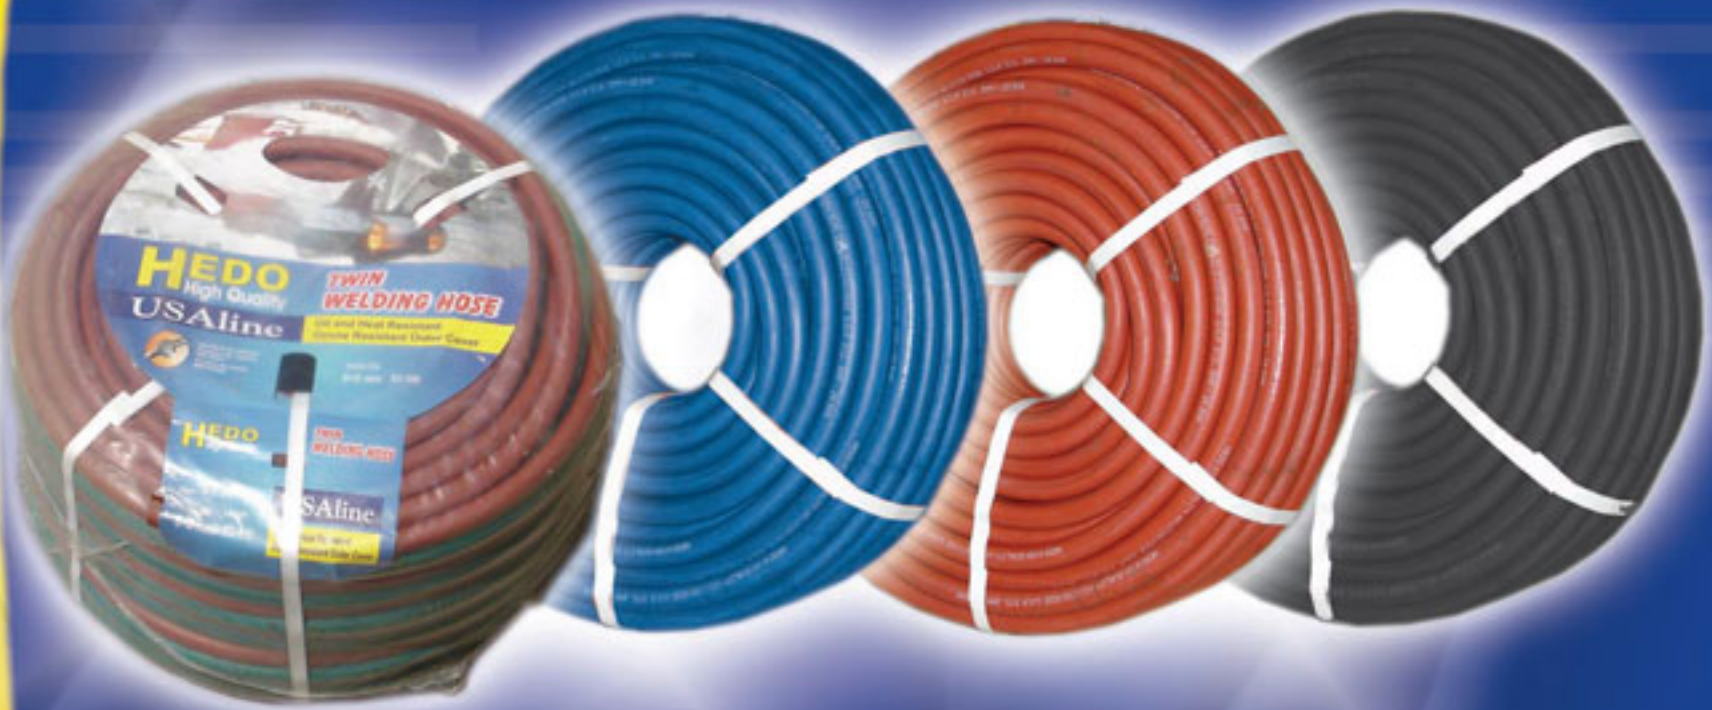

Model

Hose -AC(Hedo)

Hose -OX(Hedo)

Twin_Hose - OX/AC(Hedo)

Hose -Air(Hedo)

Package:

Description

Acetylene Welding Hose - Red

Size: 8x15mm

Oxygen Welding Hose - Blue

Size: 8x15mm

Twin Welding Hose (OX/AC) - Red + Green

Size: 8 x15mm+ 8 x15mm

Pneumatic Tool Hose/Air Tool Hose- Black

Size: 8x15mm

50 m/Roll